




Ducted unit with high ESP

FWN-AT

BLDC fan motor unit for horizontal or vertical mounting.
Continuous air flow regulation and fan speed modulation

- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › The air filter can easily be removed for cleaning

FWN-AT

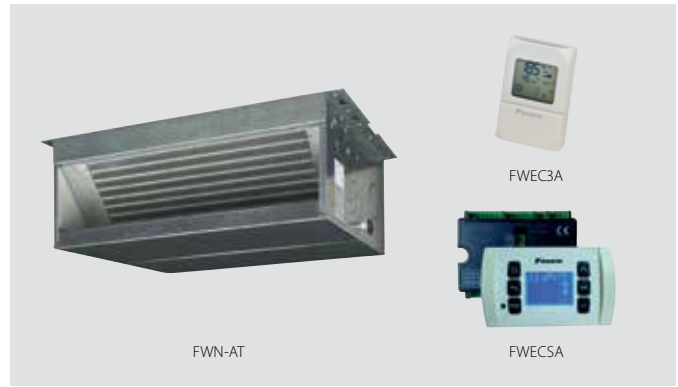

		FWN-AT		04	05	06	07	08	10	
		2-pipe								
Cooling capacity	Total capacity	High	kW	3.91 (1) / 3.80 (2)	4.76 (1) / 4.65 (2)	6.17 (1) / 6.02 (2)	6.81 (1) / 6.66 (2)	7.83 (1) / 7.58 (2)	8.75 (1) / 8.50 (2)	
		Medium	kW	3.54 (1) / 3.47 (2)	4.27 (1) / 4.20 (2)	5.77 (1) / 5.65 (2)	6.37 (1) / 6.25 (2)	7.01 (1) / 6.84 (2)	7.79 (1) / 7.62 (2)	
		Low	kW	2.87 (1) / 2.83 (2)	3.42 (1) / 3.38 (2)	5.33 (1) / 5.23 (2)	5.87 (1) / 5.77 (2)	6.32 (1) / 6.20 (2)	6.97 (1) / 6.85 (2)	
	Sensible capacity	High	kW	3.09 (1) / 2.98 (2)	3.68 (1) / 3.57 (2)	4.63 (1) / 4.48 (2)	5.21 (1) / 5.06 (2)	6.55 (1) / 6.30 (2)	7.10 (1) / 6.85 (2)	
		Medium	kW	2.77 (1) / 2.70 (2)	3.26 (1) / 3.19 (2)	4.32 (1) / 4.20 (2)	4.85 (1) / 4.73 (2)	5.77 (1) / 5.60 (2)	6.24 (1) / 6.07 (2)	
		Low	kW	2.23 (1) / 2.19 (2)	2.58 (1) / 2.54 (2)	3.99 (1) / 3.89 (2)	4.45 (1) / 4.35 (2)	5.14 (1) / 5.02 (2)	5.53 (1) / 5.41 (2)	
Heating capacity	2-Pipe	High	kW	4.85 (4) / 8.22 (5)	5.79 (4) / 9.78 (5)	7.67 (4) / 13.02 (5)	8.65 (4) / 14.68 (5)	9.46 (4) / 15.98 (5)	10.70 (4) / 18.10 (5)	
		Low	kW	3.63 (4) / 6.16 (5)	4.24 (4) / 7.17 (5)	6.68 (4) / 11.31 (5)	7.49 (4) / 12.71 (5)	7.74 (4) / 13.10 (5)	8.70 (4) / 14.74 (5)	
	4-Pipe	High	kW	-						
		Low	kW	-						
Power input	High	W	112 (6)		152 (6)		248 (6)			
	Medium	W	73 (6)		125 (6)		170 (6)			
	Low	W	40 (6)		102 (6)		124 (6)			
FCEER			C	B	C					
FCCOP			B	A	B		C	B		
Weight	Unit	kg	32.5	33.3	40.6	41.7	47.3	48.7		
	2-pipe Unit	kg	-							
	4-pipe Unit	kg	-							
Water pressure drop	Cooling	High	kPa	17 (6) / 17 (1)	14 (6) / 14 (1)	24 (6) / 24 (1)	19 (6) / 19 (1)	24 (6) / 24 (1)	16 (6) / 16 (1)	
	Heating	High	kPa	14 (4) / 15 (5)	12 (4) / 12 (5)	19 (4) / 21 (5)	15 (4) / 17 (5)	20 (4) / 20 (5)	13 (4) / 13 (5)	
Water heat exchanger	Water flow rate	Cooling	High	l/min	11.19 (1)	13.62 (1)	17.65 (1)	19.48 (1)	22.40 (1)	25.02 (1)
			Medium	l/min	10.12 (1)	12.20 (1)	16.50 (1)	18.22 (1)	20.03 (1)	22.27 (1)
			Low	l/min	8.22 (1)	9.78 (1)	15.25 (1)	16.80 (1)	17.92 (1)	19.95 (1)
	Heating	High	l/min	12.02 (5)	14.32 (5)	19.03 (5)	21.48 (5)	23.37 (5)	26.47 (5)	
		Medium	l/min	10.93 (5)	12.90 (5)	17.87 (5)	20.13 (5)	21.07 (5)	23.80 (5)	
	Low	l/min	9.00 (5)	10.48 (5)	16.53 (5)	18.58 (5)	19.15 (5)	21.55 (5)		
Fan	Air flow rate	High	m ³ /h	802 (6)	792 (6)	1,241 (6)	1,206 (6)	1,609 (6)	1,584 (6)	
		Low	m ³ /h	534 (6)	531 (6)	1,021 (6)	998 (6)	1,208 (6)	1,200 (6)	
Sound power level	Total	High	dBA	66 (3)		69 (3)		72 (3)		
		Medium	dBA	61 (3)		63 (3)		67 (3)		
		Low	dBA	54 (3)		59 (3)	61 (3)	62 (3)		
	Inlet section + radiated	High	dBA	64 (3) / 64 (6)		66 (3) / 66 (6)		70 (3) / 70 (6)		
		Medium	dBA	59 (3) / 59 (6)		60 (3) / 60 (6)		64 (3) / 64 (6)		
		Low	dBA	52 (3) / 52 (6)		56 (3) / 56 (6)		60 (3) / 60 (6)		
	Outlet section	High	dBA	63 (3) / 63 (6)		65 (3) / 65 (6)		69 (3) / 69 (6)		
		Medium	dBA	58 (3) / 58 (6)		59 (3) / 59 (6)		63 (3) / 63 (6)		
		Low	dBA	51 (3) / 51 (6)		55 (3) / 55 (6)		58 (3) / 58 (6)		
Water connections	Primary coil	inch	3/4 _n							
	Additional coil	inch	-							
Water content	Primary coil	dm ³	1.29	1.64	1.65	2.13	2.16	2.75		
	Additional coil	dm ³	-							
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230							
Control systems	Wired remote control		FWEC3A / FWECSA							

(1) Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB (2) Reference: EN 1397; Eurovent certified data (3) Reference: UNI EN 3741 (4) Inlet water temperature 50 °C; same water flow as in cooling mode; inlet air temperature 20°C DB; Eurovent certified data (5) Inlet/outlet water temperature 70/60 °C; inlet air temperature 20°C DB (6) Eurovent certified data | FCEER and FCCOP are Eurovent certified data

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



17-498

10/16



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.